


To complete the data response, please see the email below which I received from A&R's engineer:

"The criteria is basically the 16,000 lb axle. Any truck at or under that limit is OK. A definitive list can not be provided. Axle loads on various trucks will vary depending on the load. Trucks with tandem axles need to have the total axle load below the 16,000 lbs.

If there is a question they should weigh the axle.

This limit was set not only with the bridge in mind but also the condition of the seawall."

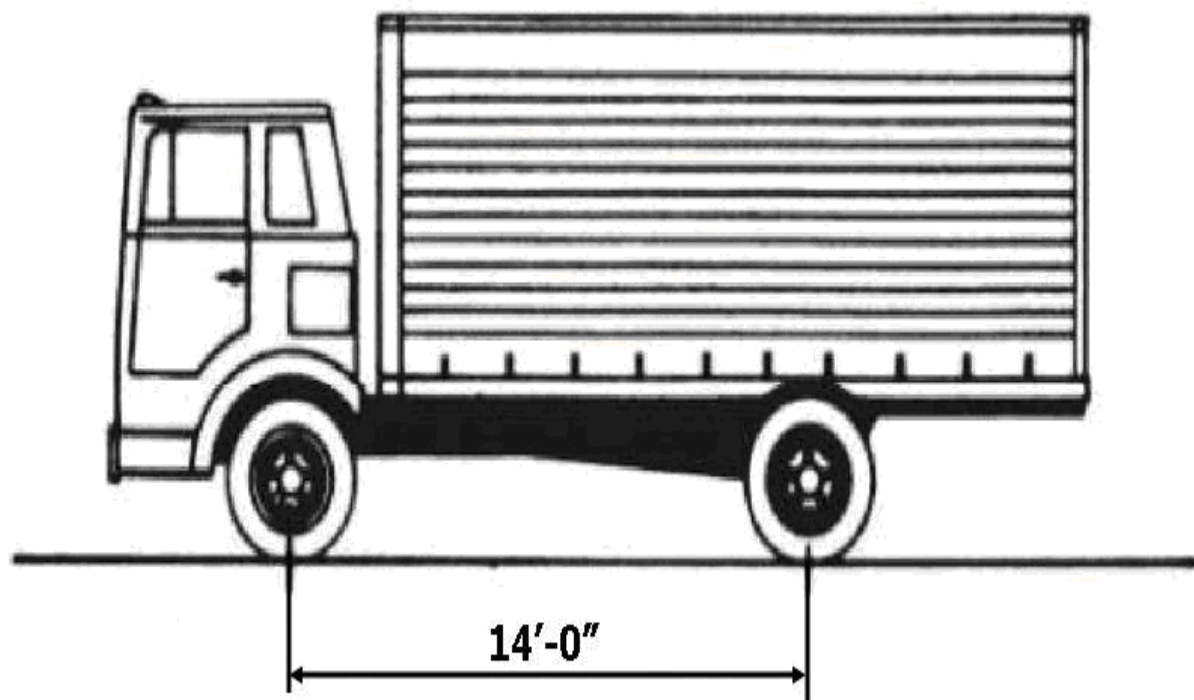

H-5     2,000 LBS.

H-10    4,000 LBS.

8,000 LBS.

16,000 LBS.